

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 7 :</b>  <b>A47G 21/18</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/49922</b>  <b>(43) International Publication Date:</b> 31 August 2000 (31.08.00)
<b>(21) International Application Number:</b> PCT/US00/04330  <b>(22) International Filing Date:</b> 18 February 2000 (18.02.00)  <b>(30) Priority Data:</b> 09/257,355                      25 February 1999 (25.02.99)                      US  <b>(71)(72) Applicant and Inventor:</b> DARK, Richard, C., G. [US/US]; 2248 Gum Tree Lane, Fallbrook, CA 92028 (US).  <b>(74) Agent:</b> GOLDMAN, Ronald, M.; Roth & Goldman, 21515 Hawthorne Blvd., Suite 214, Torrance, CA 90503-6512 (US).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> With international search report.

BEST AVAILABLE COPY

**(54) Title:** SPORT DRINKING CUP WITH VALVED STRAW CAP**(57) Abstract**

An easy-to-operate vented leak-proof drinking cup cap for a bottle is formed by a pivotable drinking spout (3) and diaphragm arrangement (4) in the cap base (7). The drinking spout that forms the mouthpiece on the upper side of the diaphragm through which the user sucks liquid, contains a portion (3b) on the underside the diaphragm. That lower spout portion carries an elastic hose or tube (8) for immersion in the bottle's liquid when the drinking spout is in the open position, whereby the series of passages through the elastic tube and drinking spout serves as a straw. When the spout is pivoted to its closed position and latched, in one movement, the lower portion of the spout swings a portion of the elastic tube against the vent (6), closing the vent, and forces another portion of that hose into an interference surface (12), creating a bend or kink in the hose that prevents liquid passage.

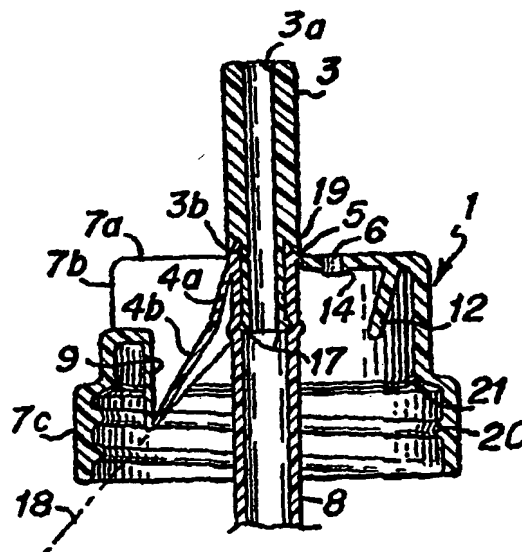

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 00/49922

PCT/US00/04330

-1-

DESCRIPTIONSPORT DRINKING CUP WITH VALVED STRAW CAPTECHNICAL FIELD

This invention relates to sport drinking cups and, more particularly,  
5 to a sport drinking cup that contains a resealable straw-like member.

BACKGROUND ART

Sports enthusiasts, particularly bicyclists, are accustomed to carrying a container of water along which they are able to efficiently access "on the run" to quench a thirst. One common form for the container is a  
10 flexible plastic bottle with a drinking spout that is manually opened and closed. Conveniently, the drinking spout serves as a mouthpiece for the drinker. Moving the spout to the open position, the cyclist inserts the spout into the mouth and squeezes the bottle, expressing drinking water. Another form is a plastic bottle having a plastic drinking straw. Being  
15 always open, the cyclists grips the bottle and, with the straw's end in the mouth, squeezes to express the drinking water.

Further, in my patent U.S. 5,392,968 granted Feb. 28, 1995, entitled Dispensing Closure and Method, hereafter referred to as the "Dark '968 patent", a one-piece molded plastic closure for fluids is described that  
20 contains a pivotable spout and a compound diaphragm, the disclosure of

WO 00/49922

PCT/US00/04330

-2-

which is incorporated herein by reference in its entirety. Among other things evident from inspection of the patent there is also described adaptations to that novel closure structure to enable the closure to serve as such a sport drinking cup cap. The structure illustrated in Figs. 20 and 21 of that patent employs a flexible thin-walled tubular extension integrally formed on the underside of a more rigid thick walled tubular fluid dispensing spout that lies on the underside of the closure base. With the spout in its open position upstanding fluid confined within the associated container or bottle is dispensed through the spout. When the spout is pivoted down to the closed or sealed position and latched, the flexible tubular extension is pressed against a seal member, a plastic member that depends from the underside of the closure base, collapsing and flattening a portion of the tube to close the fluid passage there through.

An alternative embodiment described in the patent combines the one-piece closure with a separate flexible straw to form a two-piece structure. As illustrated in Figs. 22 and 23 of that patent, a flexible plastic straw is inserted through the rigid spout and extends through the closure base and into the liquid confined in the container. When the pivotable spout is pivoted down to the closed or sealed position and latched, the pivoting spout swings the straw around and bends it, pressing a portion of the straw against a seal member, a plastic member that depends from the underside of the closure base, and, as in the preceding structure, collapses and flattens a portion of the straw to block the fluid passage. Although not specifically illustrated, the foregoing drinking cup caps may include a conventional air vent that extends through the closure base to permit liquids to be more easily sucked from the bottle. The vent allows air to enter the bottle as the liquid is sucked out.

Although novel, the foregoing drinking cup cap structures illustrated did not achieve market acceptance for reasons not herein fully described. The soft tube extending out of the mouthpiece was not acceptable and the lack of a vent in the cap made the drinking cup difficult to use.

WO 00/49922

PCT/US00/04330

-3-

Preferably air vents employed in the foregoing drinking cup caps are made sufficiently small in size so that the surface tension of the confined liquid alone would prevent any leakage when the cap was closed. One problem with small sized vents in rigid caps is that the liquid can only be sucked from the container as fast as the exterior air can enter, which is an annoyance to some. Further, because of the varied nature of liquids held in the bottle, such as beverages, juices and water, and to minimize the potential for clogging that vent, wherein operation would be more difficult, particularly for uninformed users who may not understand the purpose of the air vent, the approach taken is to use a much wider vent than would otherwise be necessary. As a consequence, the drinking cup cap would allow some minor leakage, and could not be characterized as leak-proof.

Good hygiene is a concern that is sometimes overlooked. To ensure that the drinking cup is sanitary it should be frequently disassembled and washed. The most widely available drinking cup cap uses a push-pull valve, which is formed of two components. That valve is not designed to be dismantled for cleaning. Therefore, even when the drinking cup and cap are washed in a normal manner, particles of juice or other liquids may remain between the two valve components inside the valve, causing contamination. Other drinking caps, such as those imported from China, are manufactured and assembled from an even larger number of components. One such drinking cup product consists of a cap, a straw, an a rubber tube joining the straw to the spout, and an over cap that, when twisted, closes the valve and encapsulates the spout. That product is not designed for cleaning and is almost impossible to sterilize.

A principal object of my invention is to provide a leak-proof drinking cup cap.

Another object of my invention is to provide a leak proof drinking cup that takes advantage of some elements of my prior designs while being more easily manufactured and used.

WO 00/49922

PCT/US00/04330

-4-

A further object of my invention is to provide a drinking cup cap that requires less force to unlatch and open making it easier for user's to use a drinking cup "on the run".

And a still further object of my invention is to provide a drinking cup  
5 cap that may be easily dissassembled for cleaning.

### DISCLOSURE OF THE INVENTION

In accordance with the foregoing objects and advantages, the drinking cup cap includes a pivotally mounted drinking spout that is manually pivoted, swivelled, about a pivot hinge on the base of the cap,  
10 moving between an open position, with the spout upstanding vertically, and a closed position, with the spout oriented horizontal on the upper side of the cap base. The spout includes an extended portion, the lower spout portion, which is located on the under side of the cap base. With the drinking spout being pivoted to the closed position along the upper side  
15 surface the lower spout portion simultaneously pivots toward the underside surface of the cap base. The lower spout portion is attached to an elastic tube, a portion of which ensleeves the lower spout portion and the remainder of which extends from the lower spout portion for immersion into liquid within a bottle to which the cap is attached. With the drinking  
20 spout open, a user may suck liquid through the mouthpiece, which is aided by a vent passage also contained in the cap base.

When the spout is pivoted to the closed position, the lower spout portion swings the elastic tube about and presses one portion of the elastic tube over the vent passage, and, simultaneously, pinches closed another  
25 portion of the elastic tube, thereby sealing the cap. With a single action the cap openings are closed. With both cap openings closed the confined liquid cannot leak or escape from the bottle, nor can external contaminants enter.

PCT/US00/04330

WO 00/49922

-5-

Appropriately the drinking cup includes a diaphragm that permits the drinking spout to pivot and a releasible latch to latch the drinking spout in the closed position. In accordance with another feature to the invention, except for the elastic tube, all of the foregoing elements are  
5 suitably an integral assembly formed of one-piece of plastic material, suitably polypropylene.

As an advantage, the preferred embodiment contains only two components, the elastic tube and the cap, the latter containing the integrally formed diaphragm and spout. The components may be easily  
10 separated and washed. The cap may be washed on the top shelf of the dishwasher, and the elastic tube can be thoroughly flushed out and cleaned. Reassembly is simple and requires no special tools or training.

The foregoing and additional objects and advantages of the invention together with the structure characteristic thereof, which was only briefly  
15 summarized in the foregoing passages, becomes more apparent to those skilled in the art upon reading the detailed description of a preferred embodiment, which follows in this specification, taken together with the illustration thereof presented in the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

20 In the drawings:

Figure 1 is a front perspective view of a preferred embodiment of the cap to the drinking cup, illustrated in the closed condition;

Figure 2 is an embodiment of the drinking cup containing the drinking cup cap of Fig. 1, illustrated in an open condition, and an  
25 associated bottle, partially illustrated;

Figure 3 is a top view of the drinking cup cap of Fig. 2;

Figure 4 is a front partial section view of Fig. 1, illustrating the integrally formed latch.

Figure 5 is a side section view of the drinking cup cap as illustrated in Fig. 2; and

Figure 6 is a side section view of the drinking cup cap in the closed condition as illustrated in Fig. 1.

## 5 MODES FOR CARRYING OUT THE INVENTION

Concurrent reference is made to Fig. 1 which illustrates my drinking cup cap 1 in a closed position and to Fig. 2 which illustrates the foregoing elements in an open position and, in dash lines, the associated liquid container 2, which, with the foregoing cap, forms a drinking cup. As  
10 shown in Fig. 1, the cap includes a pivotable drinking spout 3, diaphragm 4, hinge 5, vent passage 6, located behind the lower or base end of spout 3, all formed on a cap base. In the illustrated embodiment the cap base is formed of a relatively planar upper surface 7a, located on the top of  
15 cylindrical wall 7b, and a cylindrical walled collar 7c, slightly larger in diameter than and supporting wall 7b. The foregoing configuration of the cap base is preferred, although as those skilled in the art recognize from study of this specification, in other embodiments alternative geometries may be employed.

As illustrated in Fig. 2, cap 1 is attached to the top of container 2, a  
20 bottle. Since the drinking cap is intended for use with any conventional screw top plastic or glass bottle, the details of which are not necessary to an understanding of the invention, the bottle need not be further illustrated or described. An elastic tube 8, later herein more fully described, is partially illustrated, extending from the underside of drinking  
25 cap 1 and into the bottom region of that bottle.

In Fig. 1, drinking spout 3 is illustrated in its closed position, extending horizontally, pivoted down into a U-shaped recess in the cap base that extends radially through the side. The spout extends slightly beyond the side wall to the cap base, allowing a protruding portion for the  
30 user to grip or push against in order to unlatch and pivot the spout up to



WO 00/49922

PCT/US00/04330

-7-

the open position. In Fig. 2 the drinking spout 3 is illustrated in the open position, in which the drinking spout is vertically upstanding. The drinking spout is connected to hinge 5, as later herein discussed in greater detail. The hinge is a living hinge integrally formed in the upper surface of the cap base. That hinge defines the pivot axis on which the spout pivots, or more appropriately, swivels, between the spout's open and closed positions and vice-versa.

As in my prior patent, U.S. 5,392,968, pivotable movement of the drinking spout 2 is possible due to the function of diaphragm 4, which is attached to both spout 3 and to the support surfaces of the more rigid cap base. The diaphragm's flexure permits the drinking spout to be pivoted and maintains the continuity of the cap's surfaces in the face of that spout movement.

As later herein described, spout 3, when in the open position, together with elastic tube 8, forms a straw by means of which the user may suck liquid from bottle 2. Vent passage 6 extends through the upper surface 7a and serves as an air vent. When sucking on the end of the drinking spout 3 to draw up liquid, the vent permits external air to pass into the confined region on the underside of the cap base and the liquid confined in bottle 2 which aids in sucking up the liquid.

Reference is made to Fig. 3 which illustrates the embodiment in a top view with the drinking spout 3 in the open condition as in Fig. 2. The full expanse of diaphragm 4 is visible in this view. Diaphragm 4 consists of an upper or top portion 4c, which is relatively rigid, a top flexible portion 4a and a lower flexible portion 4b. A semi-circular region, recessed from planar top surface 7a in the cap base, is bordered on one side by a depending circular wall 9, only partially visible in Figs. 1 and 2, to which diaphragm 4 is attached. The diaphragm essentially serves as part of the border or surface to that recess.

Circular wall 9 extends in a semi-circle about the base end of spout 3 and is symmetric therewith. The wall's length varies and is determined by

WO 00/49922

PCT/US00/04330

-8-

the downward slope of diaphragm 4; the wall need be only deep enough to reach and attach the outer edges or border of the diaphragm 4. That wall's depth varies from a maximum at the center to a minimum at each end at hinge 5. Circular wall 9 is relatively rigid and provides a firm support for the diaphragm. In turn the juncture between the diaphragm and that wall permits the diaphragm to flex in the manner described in the Dark '968 patent, during the opening and closing operation of the spout.

The upper planar surface 7a is interrupted also by a walled U-shaped recessed portion 10, recessed from the top planar surface, and forms a passage or trench from the aforementioned recessed region, through both the depending circular wall 9 and the outer cylindrical wall 7b. The U-shaped region permits the spout to be pivoted to and held down in a horizontal position, as shown, when closed. The U-shaped recess 10 extends radially in line with the plane of rotation of spout 2, represented by line 11, and is wide enough and deep enough to receive the spout. As shown that plane of rotation extends through the axis of spout 3, vent passage 6 and, illustrated in hidden lines, an interference rib 12, the latter located on the underside of the cap's upper surface 7a.

The outer edges of lower flexible diaphragm portion 4b are attached to the semi-circular wall 9. Upper diaphragm portion 4c, specifically two triangular shaped portions, which are integral with of the flexible foldable portion 4a of the diaphragm, latter herein more fully described, one of which is located on each side of drinking spout 3. The triangular shaped upper diaphragm portions, being formed with a greater thickness of material and being relatively small in size than diaphragm portions 4a and 4b, are relatively rigid, relative to those other diaphragm portions. Upper portion 4c connect to the cap base along hinge 5 and also connect to spout 3. As shown diaphragm 4 serves also as a barrier to fluid. The only passages through the cap are the fluid passage through spout 3 and vent passage 7.

WO 00/49922

PCT/US00/04330

-9-

A pair of axially extending splines 15 are located on diametrically opposite positions on the outer tubular wall at the front end of drinking spout 2. Those splines protrude radially outwardly sideways a short extent. A pair of elongated barbs 16 formed in the opposed side walls to U-shaped region 10, together with splines 15 form a releasible latch that holds spout 3 in the closed position illustrated in Fig. 1, until manually released by the user by pushing up on the distal end of the spout.

Returning to Fig. 2, splines 15, only one of which is fully visible in this view, extend axially along the length of the spout. The spline's length is sufficient to engage barbs 16, molded within the side walls of U-shaped recess 10, when the spout is pivoted down.

Reference is made to Fig. 4, which is a partial front section view of Fig. 1, and better illustrates the position of the latch member when the spout is latched. As shown, the upper surface of each barb 16 is tapered downward for a short vertical distance, forming a cam surface, and then drops off horizontally. The ends of splines 15 on the spout are spaced apart horizontally a greater distance than the distance between the sloped portions of those barbs, but is spaced about the same distance as the ends of the horizontal portion of those barbs, located at the supporting walls.

To latch spout 3 closed, the user presses down on the spout to force the spout in its closed and latched position. In being pivoted down for closing, splines 15 encounter the cam or sloped surface of barbs 16, which initially provides an obstruction. The downward force exerted by the user must be sufficient to outwardly flex the side walls of the U-shaped cap portion 10 supporting barbs 16, and/or, through the splines, inwardly resiliently compress the spout, in order to move the spout down past the horizontal portion of barbs 16 and latch it in place. Once splines 15 have moved past the tapered portion of the barbs, the flexed surfaces elastically return to their original shape and the barbs overlie the splines. Splines 15 catch and are held by the horizontally oriented surface of barbs 16, which now hold the spout down against any upward force that may be exerted by

WO 00/49922

PCT/US00/04330

-10-

resiliency in diaphragm 3 and, as later herein described, by the elastic force in tube 8.

Referring next to the section view of Fig. 5, the drinking cap 1 is seen as essentially being a hollow body, formed of relatively thin walls that provides a cavity region on the underside of the upper surface 7a, bounded by cylindrical walls 7b and 7c, the diaphragm and spout. An edge of vertical circular wall 9 to the recessed region is visible in this view. The height of circular wall 9 at any angular position about the axis of the spout 3 varies with the location of the position of outer edge of diaphragm portion 4b, which extends upwardly at a steep angle relative to horizontal surface 7a. Vent passage 6 is radially displaced in position from the axis of spout 3, and from the pivot axis at hinge 5. The underside of the vent passage is also preferably surrounded by a seal 14, formed as a circular protruding portion of the underside of cap surface 7a.

Interference rib 12 is formed integral with the underside of the closure's horizontal planar surface 7a and is positioned a greater distance away from the axis of the spout 3 and hinge 5, and is positioned along a radial line 11, illustrated in Fig. 3, that intersects both the spout's axis and vent passage 6. Suitably Interference rib 12 extends down into the underside cavity region to provide a radially inwardly inclined surface oriented at an angle to the vertical, of between about five and ten degrees in a practical embodiment, angled toward and facing spout 3. As later herein described the slight angle allows the interference rib to serve a second spout latching function in combination with elastic tube 8.

Continuing with Fig. 5, drinking spout 3 contains an integral extension or, as variously termed, lower spout portion 3b, located on the underside of diaphragm 4 beneath upper surface 7a to complete the fluid passage through the spout, from the upper side of the cap base to the under side. The foot end of the lower spout portion supports a retainer ring 17, an enlarged outer diameter portion or ring that radially outwardly protrudes from the tubular wall of the spout.

WO 00/49922

PCT/US00/04330

-11-

In this embodiment the lower spout portion 3b is of a restricted outer diameter relative to the upper portion. The length of the lower spout portion is great enough to span at least the radial distance to vent passage 6, when spout 3 is pivoted about hinge 5 to the closed position, but not so great in length as to contact interference rib 12. Elastic tube 8 fits over and ensleeves that lower spout portion, frictionally engaging the lower portion's outer cylindrical wall and is secured in place on that spout portion by the frictional force of retaining ring 17, which elastically expands a small portion of the tube wall. The remaining portion of the elastic tube is suspended from the spout. The elastic tube, only partially illustrated in the figure, is of sufficient length to extend to the bottom region of the associated bottle and, like a straw, is intended to be immersed within any liquid confined in that bottle when the spout is in the open position.

When spout 3 is pivoted down to the closed position, as illustrated in the section view of Fig. 6 to which reference is next made, the lower end of the spout swings elastic tube 8 up against the underside of the closure's upper surface 7a, pressing the tube's elastic material against seal 14 on the underside of that surface and covering vent passage 6. It also presses another portion of that elastic tube against interference rib 12, producing a bend in the tube, and collapsing the tube walls between the lower spout portion's foot end and the confronting surface of the interference rib. The collapsed or "kinked" tube walls thereby block the fluid passage through the tube.

As noted earlier, interference rib 12 is inclined at a five to ten degree angle to the vertical (or ninety to ninety five degrees to the horizontal) toward the spout. The angle creates a second latch method that helps elastic tube 8 to stay in a sealed position when the spout is in the closed position. As spout 3 is pivoted to the sealed position, shown in Fig. 6, the elastic tube first engages the lower end of interference rib 12. With the user exerting downward force on the spout, a portion of that tube, located

below the end of tube extension 3b, is squeezed past that rib, temporarily compressing the tube at that portion. As that portion is moved upward above the end of the interference rib into the laterally wider region close to the underside of top surface 7a, the portion resiliently expands slightly, as  
5 the other portion of the tube engages the vent seal. That expansion allows the resilient force of the tube walls to assist in holding the bottom end of the spout in the horizontal, closed position illustrated in the figure. To move the spout end out of the closed position, thus, the force must be sufficient to re-squeeze that portion of the elastic tube. By contributing to  
10 the latching function in the foregoing way, it is possible to reduce the strength of the earlier described latch at the front end of the spout.

The portion of the elastic tube 8 sealing the air vent is supported by the rigid walls of the lower spout portion, while the tube portion carried into the bend is a suspended portion. It is appreciated that the foot end of  
15 the lower spout portion is sufficiently distant from interference rib 12 so that the kink is preferably positioned slightly below the foot end when the spout is pivoted down as illustrated. That positioning minimizes the force necessary to pivot the spout down and maintain it latched in place.

Reference is again made to Fig. 5. Diaphragm 4 is preferably a  
20 compound diaphragm described in the Dark '968 patent to which reference may be made for a more detailed description and which is incorporated herein by reference. Essentially the diaphragm is formed of two types of diaphragms that are serially connected together in between the cap base and the spout 3, comprising an invertible diaphragm 4a and a flexible  
25 foldable diaphragm 4b the edges of which are illustrated in the figure.

In the specific embodiments illustrated in that prior patent, a bisector plane is illustrated oriented at an angle of forty five degrees to the plane of the planar upper surface of the cap base, such as the horizontal plane of the upper surface 7a, illustrated in Fig 5. Plane line 18 represents  
30 a bisector plane in drinking cap 1 that contains the border of the diaphragm 4 and extends through hinge 5. In the present invention, that

WO 00/49922

PCT/US00/04330

-13-

angle between bi-sector plane 18 and the horizontal is made more shallow, specifically forty degrees. When swiveling spout 3 from the vertically upstanding open position to the closed position, the spout pushes on flexible diaphragm 4b, which in turn pulls or swivels the invertible diaphragm 4a down through the bi-sector plane.

5 With the forty degree angle the invertible diaphragm 4a component of the compound diaphragm inverts, that is, passes through the top dead center position, the bi-sector plane 18, but does not invert as fully, as occurs in the design shown in the Dark '968 patent in which the forty five  
10 degree angle is employed, before a fold over action of foldable diaphragm 4b component occurs. The description of the diaphragm's movement during closing, and opening of the spout, is adequately described in the prior Dark '968 patent, which is incorporated herein by reference, and not here repeated.

15 With full invertible diaphragm inversion it was found that a residual propensity for the diaphragm to pull up slightly occurs, pivoting the spout back by up to five degrees of arc, from the position in which the spout is closed, assuming the spout latch is removed or disabled. Such residual force appears to be due to the fact that the polypropylene material of which  
20 the diaphragm is preferably constructed, unlike rubber, does not completely "relax" in the inverted position, and the diaphragm material is distorted along the outer edges. That return or spring back force is small, and much much smaller than the force required to move the diaphragm back through the top dead center position of the invertible plane.

25 For the most part the invertible diaphragm's residual spring back force is of little or no concern, since the closure's spout latch holds the spout down tightly sealed, and, accordingly, so is the attached diaphragm. Due to the nature of a sport drinking bottle's use, however, one desires to make the drinking bottle as easy to open as possible. To achieve that ease,  
30 a latch for the spout should be designed to be less strong than in the foregoing closures of the Dark '968 patent. Since the latch 15 and 16 must

handle the described residual spring back force created by the diaphragm's inversion, the problem addressed was to reduce or divert that force. The present invention accomplishes that by reducing the angle of the diaphragm from forty-five degrees to forty degrees. Such change is found to  
5 reduce that spring back force to a lower level. The invertible diaphragm portion is no longer required to fully invert when the spout is sealed closed. The spout latch may now be of a weaker design and, hence, is easier to release.

As illustrated in Fig. 5, drinking spout 3 is attached to the  
10 diaphragm 4 by a connecting portion at a position slightly above the horizontal surface 7a of the cap base to enable the drinking spout to swivel about the pivot axis of hinge 5. The smaller diameter lower spout portion 3b therefore extends up to a position slightly above surface 7a. That permits diaphragm 4 to be slightly greater in size, which facilitates pivoting  
15 of the spout between its open and closed positions.

As shown in Figs. 5 and 6, cylindrical wall 7c serves as a collar for connecting drinking cap 1 to bottle 2. The internal side of that wall contains an appropriate screw thread 20 molded into the wall for attaching the drinking cap to screw-type container or bottle 2, earlier illustrated in  
20 Fig. 2, and a flexible annulus 21 that extends from an inner cylindrical wall and is integral therewith. That annulus is radially inwardly directed and is downwardly sloped and is oriented to engage the top edge of the associated drinking bottle and serves as a liquid seal. It is recognized that other conventional side wall configurations may be substituted to connect  
25 the cap to the bottle, all of which come within the scope of my invention.

As those skilled in the art appreciate from the side section view of Fig. 5, all of the foregoing elements of the drinking cup cap, excepting the elastic tube 10, may be molded from one piece of plastic material, suitably polypropylene, as example, in the manner described in the Dark '968  
30 patent, and forms an integral unitary one-piece structure. Preferably elastic tube 8 is formed of rubber. Less preferred embodiments may use a



WO 00/49922

PCT/US00/04330

-15-

tube formed of polypropylene material. However, polypropylene creeps, a disadvantage, while rubber is easier to repeatedly stretch and compress, which makes it preferable.

The foregoing provides a leakproof drinking cup cap that is easy to open and close. It is formed of only two component pieces which are easily assembled together. It is easy to disassemble and clean. One need only remove the cap from the bottle and open the spout, pull off the elastic tube 8, which is only frictionally held in place. The cap may be washed by hand or in the top shelf of the dishwasher, and the tube can be flushed and cleaned, leaving no trace of any beverage. The bottle may be separately cleaned. Reassembly is equally simple. The end of elastic tube 8 is simply forced onto the lower spout portion 3b, elastically expanding the tube end over the ring 17. As is apparent, no special tools or training is required.

It is believed that the foregoing description of the preferred embodiments of the invention is sufficient in detail to enable one skilled in the art to make and use the invention. However, it is expressly understood that the detail of the elements presented for the foregoing purpose is not intended to limit the scope of the invention, in as much as equivalents to those elements and other modifications thereof, all of which come within the scope of the invention, will become apparent to those skilled in the art upon reading this specification. Thus the invention is to be broadly construed within the full scope of the appended claims.

THE CLAIMS

1. A resealable drinking cup cap comprising:

a cap base;

a drinking spout and a diaphragm moved by said drinking spout  
5 mounted on said cap base;

said drinking spout being pivotally mounted to said cap base for  
swiveling movement between an open position and a closed position and  
said diaphragm being connected between said cap base and said spout,  
wherein said diaphragm at least in part swivels responsive to said drinking  
10 spout moving between said open position and said closed position;

said drinking spout including an upper spout portion located on an  
upperside of said cap base and a lower spout portion located principally on  
an underside surface of said cap base;

an interference surface protruding downwardly from said underside  
15 surface of said cap base, said interference surface facing and being  
angularly inclined toward said lower spout portion;

a vent passage through said cap base for normally venting the  
underside of said cap base when said drinking spout is in said open  
position, said vent passage being located in said cap base between and  
20 radially aligned with said upper spout portion and said interference  
surface; and

latch means for releasibly latching said drinking spout in the closed  
position; and, further comprising:

an elastic tube, said elastic tube having elastically collapsible  
25 tubular walls, said elastic tube having an upper end portion attached to  
and ensleeving said lower spout portion and a suspended portion  
suspended from said lower spout portion;

said lower spout portion for swinging said upper end portion of said  
elastic tube along said underside of said cap surface to cover said vent  
30 passage, responsive to said spout being moved into said closed position,  
and, simultaneously, swinging said suspended portion of said elastic tube

WO 00/49922

PCT/US00/04330

-17-

into contact with said interference surface to bend and squeeze closed said suspended portion of said elastic tube between a bottom end of said lower spout portion and said seal surface, to thereby close said drinking cup cap.

2. The invention as defined in claim 1, further comprising: a liquid  
5 container for confining liquid, said liquid container including an open top;  
and wherein said drinking cup cap further includes: a collar; fastening  
means carried by said collar for fastening said drinking cup cap to said  
open top; and a seal for providing a liquid tight seal between said drinking  
cup cap and said open top when said drinking cup cap is fastened thereto.

10 3. The invention as defined in 2 wherein said diaphragm is a  
compound diaphragm and comprises:

a flexible diaphragm and an invertible diaphragm serially connected  
between a lower end of said upper spout portion and said cap base;

15 said invertible diaphragm providing an over dead center arrangement  
that pre-loads said drinking spout in the direction of said open position,  
responsive to said drinking spout being in the dispensing position, and  
pre-loads said drinking spout in the direction of said closed position,  
responsive to said drinking spout being moved from said open position  
toward said closed position;

20 said flexible diaphragm and said invertible diaphragm being  
angularly inclined relative to one another to define a crease there between  
responsive to said drinking spout being in said open position;

25 said flexible diaphragm including a top end connected to said lower  
end of said upper spout portion and defining a bend line therewith at said  
top end, said flexible diaphragm being bendable relative to said drinking  
spout at said connection with said lower end;

30 said lower end of said drinking spout being movable in an arcuate  
path to push said flexible diaphragm during the initial course of travel of  
said drinking spout from said open position to said closed position and,  
through said flexible diaphragm, to invert said invertible diaphragm and,

during additional movement to said closed position, to place said flexible diaphragm in a position underlying said upper spout portion;

said flexible diaphragm being adapted to swivel about and be pushed and then be pulled by said arcuately moving lower end of said upper spout portion, whereby said flexible diaphragm is temporarily wrapped over and forms a bend therein at said lower end of said upper spout portion and is placed in a position underlying said upper spout portion responsive to said drinking spout attaining the closed latched position.

4. The invention as defined in claim 1, wherein said lower spout portion is of a predetermined length, said length being greater than the distance between said vent passage and said upper spout portion and less than the distance between said upper spout portion and said interference surface, when said spout is in the open position.

5. The invention as defined in claim 3, wherein said lower spout portion is of a predetermined length, said length being greater than the distance between said vent passage and said upper spout portion and less than the distance between said upper spout portion and said interference surface, when said spout is in the open position.

6. The invention as defined in claim 1, wherein said cap base, said diaphragm, said spout, said interference surface and said latch means comprise an integral assembly formed in one-piece of plastic material.

7. The invention as defined in claim 1, wherein said cap base further includes a hinge for pivotally mounting said drinking spout to said cap base, said hinge being integrally formed in said cap base and defining a pivot axis.

8. The invention as defined in claim 6, wherein said cap base further includes a hinge for pivotally mounting said drinking spout to said cap base, said hinge being integrally formed in said cap base and defining a pivot axis.

9. The invention as defined in claim 8, wherein said plastic material comprises polypropylene, and wherein a distal edge of said diaphragm,

WO 00/49922

PCT/US00/04330

-19-

most remote from said drinking spout, and said pivot axis define a bisector plane, said plane being oriented at an angle of 40 degrees relative to a reference plane, said reference plane being oriented normal to the axis of said drinking spout when said drinking spout is in the open position.

5        10. The invention as defined in claim 4, wherein said angular incline of said interference surface is a predetermined angle in the range of from five degrees to no greater than ten degrees from the vertical, said vertical being defined by the axis of said spout when said spout is in the open position.

10       11. The invention as defined in claim 6, wherein said elastic tube consists of rubber.

12. The invention as defined in claim 8, wherein said angular incline of said interference surface is a predetermined angle in the range of from five degrees to no greater than ten degrees from the vertical, said vertical  
15 being defined by the axis of said spout when said spout is in the open position.

13. The invention as defined in claim 12, wherein said cap base includes a radially extending U-shaped recessed portion for receiving said spout, when said spout is in the closed position, said U-shaped recessed  
20 portion including side walls; and wherein said latch means comprises:

a pair of splines located on diametrically opposite sides of and extending in parallel to the axis of said spout; and

a pair of barbs located on respective ones of said side walls of said radially extending U-shaped recessed portion, said barbs containing a cam  
25 surface.

14. The invention as defined in claim 1, wherein said spout is of a length sufficient to extend beyond and overhang the side of the upper surface of said cap base, when said spout is latched in said closed position, for providing a gripping surface.

30       15. A resealable drinking cup cap comprising:  
a cap base;

WO 00/49922

PCT/US00/04330

-20-

a drinking spout and a diaphragm moved by said spout mounted on said cap base;

said spout being pivotally mounted to said cap base for swiveling movement between an open position and a closed position and said  
5 diaphragm being connected between said cap base and said spout, wherein said diaphragm at least in part swivels responsive to said drinking spout moving between said open position and said closed position;

a living hinge connected between said cap base and said drinking spout for pivotally mounting said drinking spout to said cap base, said  
10 hinge being integrally formed in said cap base and defining a pivot axis;

said drinking spout including an upper spout portion located on an upperside of said cap base and a lower spout portion located principally on an underside surface of said cap base;

said diaphragm further comprising:  
15 a flexible diaphragm and an invertible diaphragm serially connected between a lower end of said upper spout portion and said cap base;

said invertible diaphragm providing an over dead center arrangement that pre-loads said drinking spout in the direction of said open position, responsive to said drinking spout being in the dispensing position, and  
20 pre-loads said drinking spout in the direction of said closed position, responsive to said drinking spout being moved from said open position toward said closed position;

said flexible diaphragm and said invertible diaphragm being angularly inclined relative to one another to define a crease therebetween  
25 responsive to said drinking spout being in said open position;

said flexible diaphragm including a top end connected to said lower end of said upper spout portion and defining a bend line therewith at said top end, said flexible diaphragm being bendable relative to said drinking spout at said connection with said lower end;

30 said lower end of said drinking spout being movable in an arcuate path to push said flexible diaphragm during the initial course of travel of

WO 00/49922

PCT/US00/04330

-21-

said drinking spout from said open position to said closed position and, through said flexible diaphragm, to invert said invertible diaphragm and, during additional movement to said closed position, to place said flexible diaphragm in a position underlying said upper spout portion;

5        said flexible diaphragm being adapted to swivel about and be pushed and then be pulled by said arcuately moving lower end of said upper spout portion, whereby said flexible diaphragm is temporarily wrapped over and forms a bend therein at said lower end of said upper spout portion and is placed in a position underlying said upper spout portion responsive to said  
10        drinking spout attaining the closed latched position;

             wherein a distal edge of said diaphragm, most remote from said drinking spout, and said pivot axis define a bi-sector plane, said plane being oriented at an angle of forty degrees relative to a reference plane, said reference plane being oriented normal to the axis of said drinking spout  
15        when said drinking spout is in the open position;

             an interference surface protruding downwardly from said underside surface of said cap base, said interference surface facing and being angularly inclined toward said lower spout portion;

             a vent passage through said cap base for normally venting the  
20        underside of said cap base when said spout is in said open position, said vent passage being located in said cap base between and radially aligned with said upper spout portion and said interference surface; a seal for said vent passage on said underside of said cap base, said seal bordering said vent passage and protruding from said underside;

25        said lower spout portion being of a predetermined length, said predetermined length being greater than the distance between said vent passage and said upper spout portion and less than the distance between said upper spout portion and said interference surface when said spout is in the open position; and

30        latch means for releasibly latching said spout in the closed position, said latch means including a pair of splines, said splines axially extending

WO 00/49922

PCT/US00/04330

-22-

and radially outwardly protruding from diametrically opposite sides of said upper spout portion, and a pair of latch barbs located in said cap base for engagement with said splines;

5 said cap base, said diaphragm, said drinking spout, said interference surface and said latch means comprising an integral assembly formed in one-piece of polypropylene plastic material and, further comprising:

an elastic tube, said elastic tube having elastically collapsible tubular walls, said elastic tube having an upper end portion attached to and ensleeving said lower spout portion and a suspended portion

10 suspended from said lower spout portion;

said lower spout portion for swinging said upper end portion of said elastic tube into contact said vent seal along said underside of said cap surface to cover said vent passage, responsive to said drinking spout being moved into said closed position, and, simultaneously, swinging said

15 suspended portion of said elastic tube into contact with said interference surface to bend and squeeze closed said suspended portion of said elastic tube between a bottom end of said lower spout portion and said seal surface, to thereby close said drinking cup cap.

16. The invention as defined in claim 15, wherein said elastic tube  
20 comprises rubber; and wherein said angular incline of said interference surface is a predetermined angle in the range of from five degrees to no greater than ten degrees from the vertical, said vertical being defined by the axis of said spout when said spout is in the open position.

17. A leakproof vented drinking cup cap comprising a base having  
25 top and bottom surfaces, and a vent passage through said base; a pivotable spout extending through said base, said spout having first and second ends and a fluid passage therethrough, said spout being pivotable between a closed position in which said spout is oriented alongside said base and an open position in which said spout is oriented upstanding from  
30 said base; said pivotable spout and said base comprising a unitary assembly formed of one piece of plastic material; an elastic tube coupled to



WO 00/49922

PCT/US00/04330







-23-

said second end of said spout to define with said spout a straw for passing fluid there through; said spout for carrying said elastic tube to a position covering said vent passage to prevent fluid leakage through said vent passage and for kinking said elastic tube to block fluid passage there  
5 through, when said spout is moved to said closed position.

WO 00/49922

PCT/US00/04330

1/1

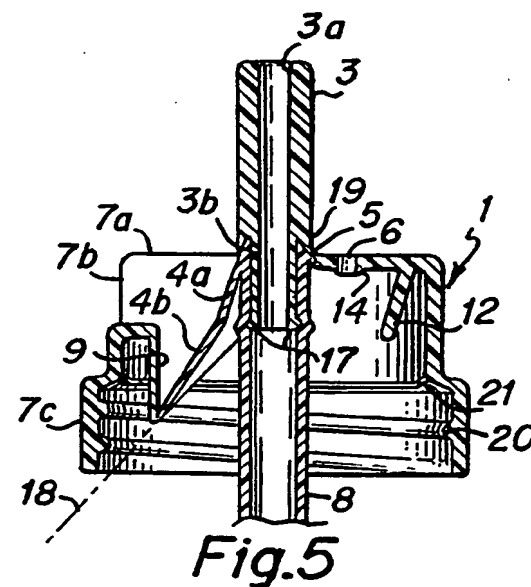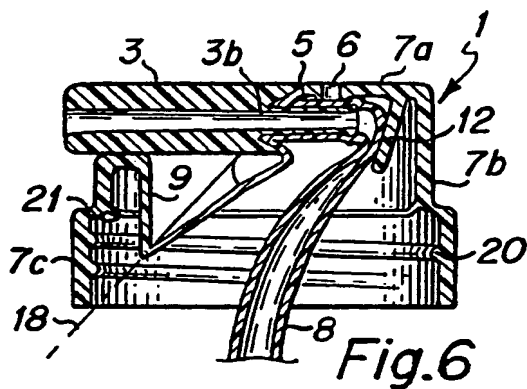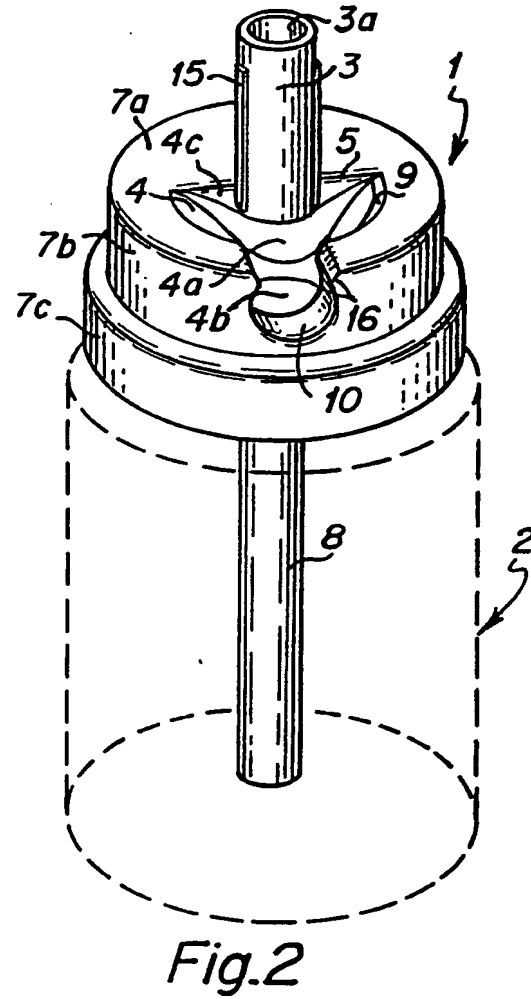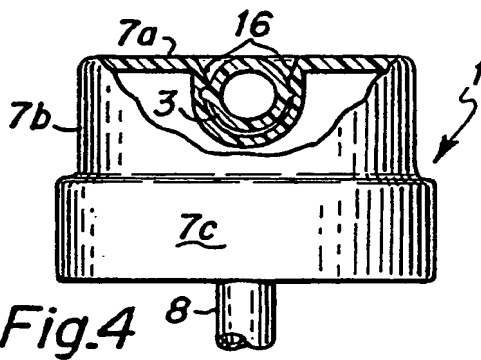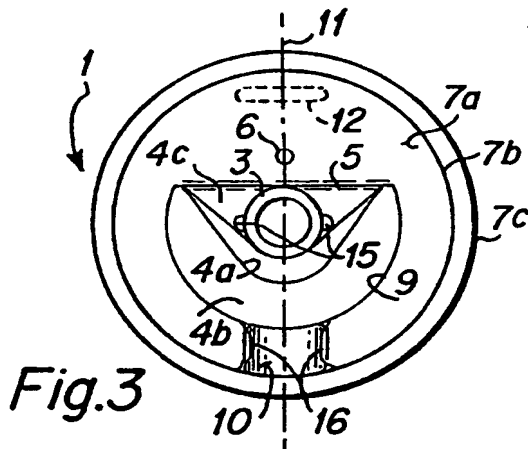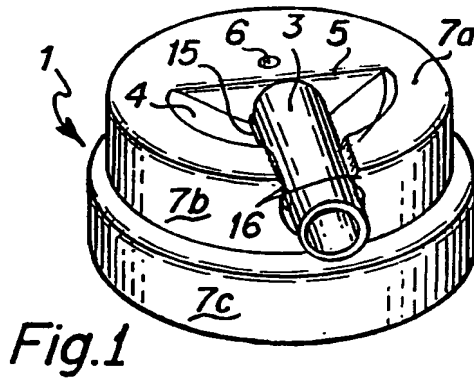

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/04330

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(7) : A47G 21/18

US CL : 220/709, 708

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 220/709, 708, 707, 711, 714, 715, 717, 719

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,203,468 A (HSU) 20 April 1993, See whole document.	1-17
A	US 5,465,866 A (BELCASTRO) 14 November 1995, See whole document.	1-17



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

05 APRIL 2000

Date of mailing of the international search report

18 APR 2000

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

STEPHEN CASTELLANO

Telephone No. (703) 308-1035

*Sheila Vanev*  
Paralegal Specialist  
Technology Center 3700

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**